

NEW!



TYTAN SR1 Sliding Gate

PF9010



Product Information

Specification

LPS 1175 SR1
UKCA + CE Approved

Gate Speed

4 seconds per metre

Material Construction

Aluminium construction with zinc-plated steel base and tower, including a steel catch post.

Description

Our SR1-rated gates provide exceptional durability and security, meeting LPS 1175 A1 standards to resist physical force and break-ins.

Featuring a German-engineered Feig control panel with a frequency converter and a 3-phase MGM 0.75kW brake motor, they support various configurations like airlock systems. The gates come with a steel catch post, added support and anti-lift capping for increased security.

Pre-assembled and delivered with crane-equipped vehicles for easy installation, these gates are made of corrosion-resistant, high-strength aluminium, with customisable infill to meet SR1 requirements.

Industry Standard

In compliance with the LPS 1175 A1, the TYTAN SR1 can resist category A attacks using basic tools for up to 1 minutes.

Known for their build quality, these gates are a trusted solution for foundational security needs in various industrial and commercial settings.

Specific product info

Gate Speed

4 seconds per metre

Duty Cycle

100% Heavy Industrial Usage
Suitable for Indoor & Outdoor Usage

Specification

UKCA + CE Approved
LPS 1175 SR1

Power Requirements

Single Phase 240v 50Hz 10 Amps

Colours

All RAL Colours Available
(Non Standard RAL's Optional Cost)

Maximum Span Dimensions

12 metre clear drive
through opening

Maximum Height Dimensions

2.4 Metres (max. width 12m)
3 Metres (max. width 8m)

Material Construction

Aluminium construction with zinc-plated steel base and tower, including a steel catch post.

Unit Weight


Dependent upon size & infill

Key Features

- Resists attacks using basic tools for up to 1 minutes
- Designed & built to last
- Advanced locking systems
- Weather resistant construction
- Anti-lift capping for added protection
- Steel catchpost with additional support structure

Optional Extras

- Razor wire extensions
- Anti climb spikes
- Traffic lights
- Warning siren

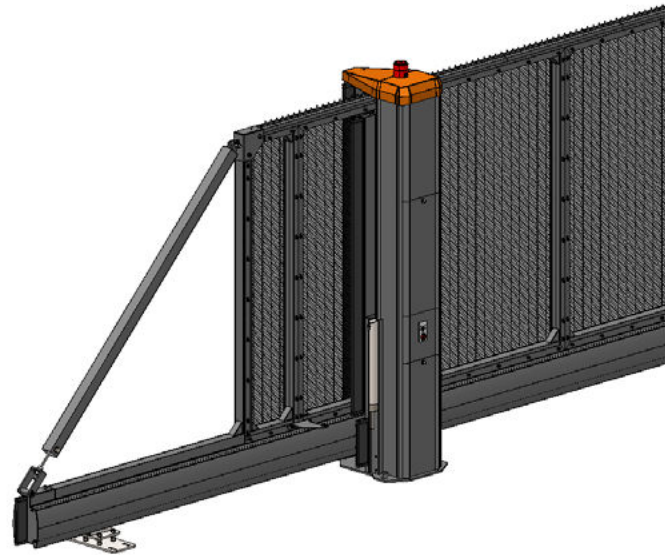

Infill Options:

- Square hollow section (SHS) set on square or diamond
- D section palisade
- 358 mesh (4mm basic)



Raising Standards
Advancing Safety



Plug + Play
Installation

