



TYTAN SR2 Automatic Bifolding Gate



Product Information

Specification

LPS 1175 SR2
UKCA + CE Approved

Gate Speed

4 seconds per metre


Description

The SR2 Bi-Folding Gate is built to LPS 1175 B3 standards, resisting sustained attack using advanced hand tools for up to 3 minutes.

A robust twin-leaf configuration uses a direct-drive gearbox system for the primary leaf and a mechanical tie rod linkage to fold the secondary leaf in perfect synchronisation.

The Feig TST FUZ2-B control system ensures smooth, coordinated motion and full EN 12453 compliance.

Pre-wired and tested, the TYTAN SR2 delivers outstanding performance and reliability for high-throughput industrial and security sites.

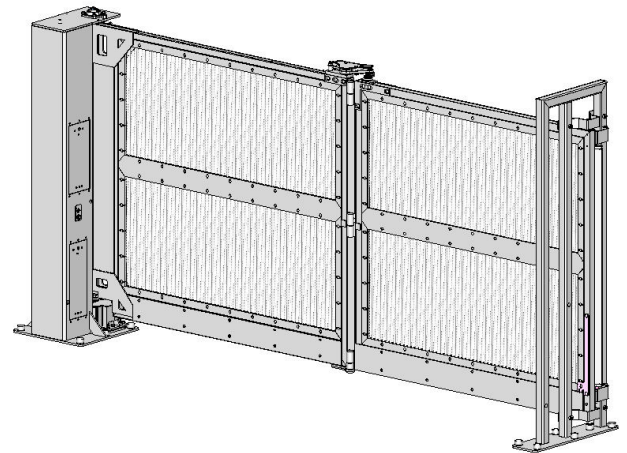

Industry Standard

In compliance with LPS 1175, the TYTAN SR2 can withstand category B attacks using advanced tools for up to 3 minutes.

Known for their build quality and resilience, these gates are a critical security solution for high-risk settings.

Infill Option:

CHS
W-section palisade
358 mesh (Super 10)



Specific product info

Gate Speed

4 seconds per metre

Duty Cycle

100% Heavy Industrial
Usage Suitable for Indoor
& Outdoor Usage

Specification

UKCA + CE Approved
LPS 1175 SR2

Power Requirements

Single Phase 240v 50Hz 10 Amps

Colours

All RAL Colours Available
(Non Standard RAL's
Optional Cost)

Maximum Span Dimensions

5 metres for single gates
10 metre for for double gates

Maximum Height Dimensions

2.4 - 3 metres

Finish

Hot-dip galvanised + 2-pack paint

Unit Weight

Dependent upon size

Key Features

- Certified LPS 1175 SR2 (B3 – 3 minutes)
- Reinforced folding chassis and hinge system
- Dual high-torque gearbox drive
- Feig TST FUZ2-B intelligent controller
- Plug & Play installation
- 100 % duty cycle
- UKCA + CE approved

Optional Extras

- Razor wire extensions
- Anti climb spikes
- Traffic lights
- Warning siren



Plug + Play
Installation

