



TYTAN SR3 Automatic Bifolding Gate



Product Information

Specification

LPS 1175 SR3
UKCA + CE Approved

Gate Speed


6 seconds per metre

Description

Engineered for the toughest environments, the TYTAN SR3 Bi-Folding Gate meets LPS 1175 C5 to deliver maximum resistance against sustained, heavy-tool attacks.

Its direct-drive gearbox system powers the primary leaf, with a mechanical tie-rod ensuring perfectly synchronised folding of the secondary leaf.

Combined with dual Elektradrop solenoid locks and a Feig TST FUZ2-B intelligent controller, it provides controlled, resilient operation for mission-critical security sites.

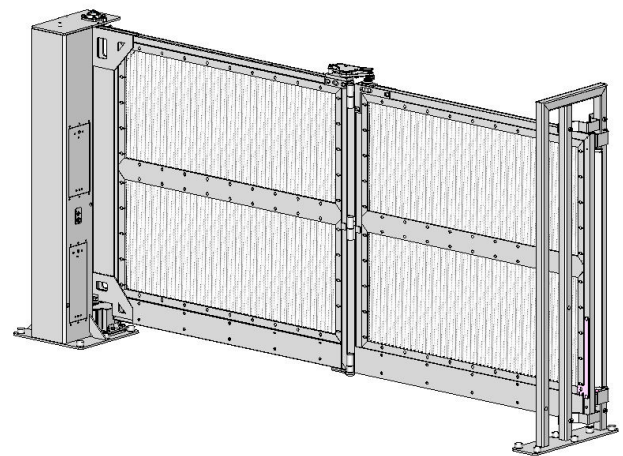

Industry Standard

In compliance with LPS 1175 C5, the TYTAN SR3 can withstand category C attacks using severe tools for up to 5 minutes.

Known for their build quality and resilience, these gates are a critical security solution for high-risk settings.

Infill Option:

358 (Super 10) + ArmaWeave
Solid steel sheet option



Specific product info

Gate Speed

6 seconds per metre

Duty Cycle

100% Heavy Industrial
Usage Suitable for Indoor
& Outdoor Usage

Specification

UKCA + CE Approved
LPS 1175 SR3

Power Requirements

Single Phase 240v 50Hz 10 Amps

Colours

All RAL Colours Available
(Non Standard RAL's
Optional Cost)

Maximum Span Dimensions

5 metres for single gates
10 metre for double gates

Maximum Height Dimensions

2.4 - 3 metres

Finish

Hot-dip galvanised + 2-pack paint

Unit Weight

Dependent upon size

Key Features

- Certified to LPS 1175 SR3 (C5 – 5 minutes)
- Reinforced twin-leaf folding chassis
- Feig TST FUZ2-B controller
- Locinox Elektradrop SR locking system
- 100 % duty cycle operation
- UKCA + CE approved

Optional Extras

- Razor wire extensions
- Anti climb spikes
- Traffic lights
- Warning siren



Plug + Play
Installation

